FRF-104 SERIES DATA SHEET

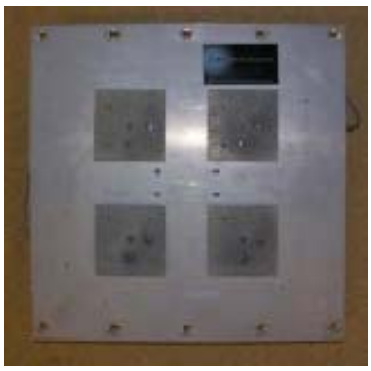

Description:：High Gain L1/L2 Dual-Polarized GPS Antenna Array

DESCRIPTION

FRF-104: L1/L2 high gain GPS array. Supports both Right-Hand and Left-Hand Circular (RHCP & LHCP) Polarizations.

SPECIFICATIONS

Frequency MHz	1227 ±12 MHz; 1575 ±12
Gain:	11.5 dB peak
VSWR	2.0:1
Pattern	Directional, 30° Beamwidth
Polarization	Dual Circ Pol: RHCP and LHCP
Connector	SMA
Weight	6.8 pounds
Height	15” x 15” x 1” deep
Finish	Anodized aluminum

PERFORMANCE

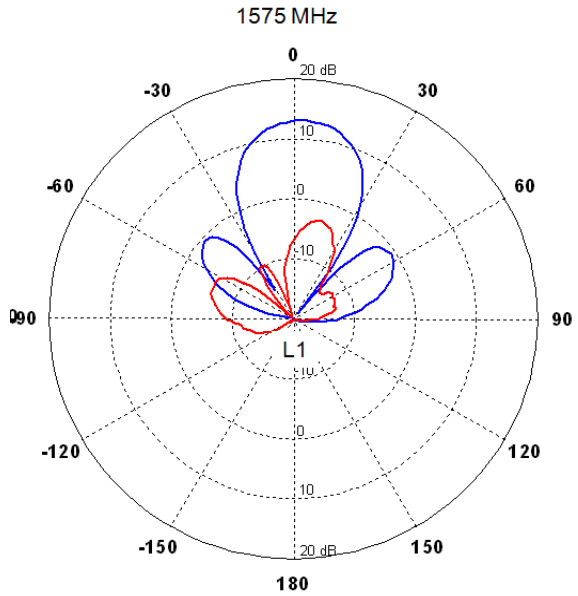

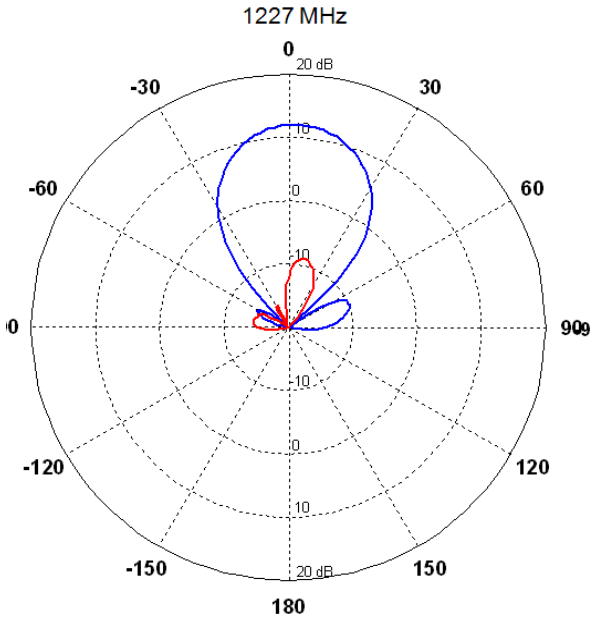

©2011 FIRST RF Corporation™ (last revised April 28, 2011) all rights reserved
Specifications subject to change without notice.

FIRST RF Corporation: www.firstrf.com
4865 Sterling Drive Boulder, CO 80301
For more information contact: Products@firstrf.com
or 303-449-5211 x160